



and economic way to save leakage rate with limited investment and get a fast return In few months and power savings.

In addition, we have a special project team to focus on custom design and special requirement.

### **OUR MISSION:**

Be the market leader in Waterworks Valve Industry.

### **COMPANY CULTURE:**

Technology through **INNOVATION**.

Quality product and service through **QUALITY** Personnel.

Business growth through **COHESIVE** partnership.









#### **RESILIENT SEAT GATE VALVE**

: GBHX/GBCX Model : DN 50-600mm Size : BS 5163, BS EN 1074; BS EN 1171 F4 (DIN) Standard

Pressure ratings: PN10, PN16, PN25 : -10°C to 80°C Temperature : Water / Waste Water Medium



### **COMBINATION AIR RELEASE VALVE**

: KARX Model Size DN 50-300 mm Pressure Ratings: PN10, PN16 Temperature : -10°C to 80°C Medium : Water



# RESILIENT SEAT RISING STEM GATE VALVE

Model : RBHX

Size : DN 50-300mm : BS 5163, BS EN 1074; Standard

BS EN 1171 F4 (DIN)

Pressure ratings: PN10, PN16 Temperature -10°C to 80°C : Water / Waste Water Medium



### **AIR RELEASE VALVE**

: ARVS Model Size : DN 15-40 mm Pressure Ratings: PN10, PN16 Temperature : -10°C to 80°C : Water Medium



#### **RESILIENT SEAT BUTTERFLY VALVE**

Model : FBGD

Medium

: DN 100-1800 mm Size : EN593 / AWWA C504 Standard Pressure Ratings: PN10, PN16 & PN25 : -10°C to 80°C Temperature : Water / Waste Water



#### **SEWAGE COMBINATION AIR RELEASE VALVE**

Model : SKAR

Size : DN 50-200 mm Pressure Ratings: PN10, PN16 Temperature : -10°C to 80°C : Waste Water



#### ZLE SILENT CHECK VALVE

: NSCV DN 50-900 mm Pressure Rat Temperature : Clean Wate



#### **RUBBER DISC CHECK VALVE**

Model : RDCV : DN 50-600 mm Size Pressure Ratings: PN10, PN16 Temperature : -10°C to 80°C : Water / Waste Water



# **PRODUCT**

### FIRE FIGHTING VALVE



#### **OS&Y GATE VALVE**

Model : FRHF Size : DN 50-300mm

Standard : FM

Pressure ratings: PN10, PN16,

CL125/150

Temperature Medium : Water

: -10°C to 80°C



#### **GROOVED GATE VALVE**

Model : FRHG Size : DN 50-300mm

Standard : FM

Pressure ratings: PN10, PN16,

CL125/150

Temperature : -10°C to 80°C

Medium : Water



### **NON RISING STEM GATE VALVE**

Model : FNCF

Size : DN 50-300mm

Standard : FM

Pressure ratings: PN10, PN16,

Temperature

CL125/150 : -10°C to 80°C Medium : Water



#### **NON RISING STEM GATE** VALVE

Model FNCG

Size : DN 50-300mm

Standard : FM

Pressure ratings: PN10, PN16, CL125/150

Temperature : -10°C to 80°C Medium : Water



# FM



### **VERTICAL TYPE INDICATOR**

: VIPX

Model



# WELL MOUNTED INDICATOR POST

Model : WIPX



#### FIRE FIGHTING GATE VALVE

Model : RBHX

: DN 50-300mm Size Standard : BS/GB

Pressure ratings: PN10, PN16,

CL125/150

Temperature : -10°C to 80°C

Medium : Water





# **HYDRAULIC CONTROL VALVE**



#### REMOTE FLOAT CONTROL VALVE/ ON OFF FLOAT CONTROL VALVE

 Model
 : A100

 Size
 : DN 50-600 mm

 Pressure ratings
 : PN10/16/25

 Temperature
 : 10°C to 80°C

 Medium
 : Clean/

Treated Water



### PRESSURE REDUCING VALVE

Treated Water



# SLOW CONTROL CHECK VALVE

Model : A300
Size : DN 50-600mm
Pressure ratings : PN10/16/25
Temperature : 10°C to 80°C
Medium : Clean/

Treated Water

FLOW CONTROL VALVE

Model : A400
Sizo : DN 50 60

Size : DN 50-600mm
Pressure Ratings : PN10/16/25
Temperature : 10°C to 80°C
Medium : Clean/
Treated Water



# PRESSURE RELIEF / SUSTAINING VALVE

Model : A500
Size : DN 50-600 mm
Pressure Ratings : PN10/16/25
Temperature : 10°C to 80°C
Medium : Clean/

Treated Water



### SURGE ANTICIPATING VALVE

Model : A2A5
Size : DN 50-600 mm
Pressure ratings : PN10/16/25
Temperature : 10°C to 80°C
Medium : Clean/

Treated Water



### SOLENOID CONTROL VALVE

Model : A600
Size : DN 50-600 mm
Pressure ratings : PN10/16/25
Temperature : 10°C to 80°C
Medium : Clean/

Treated Water



### PUMP CONTROL VALVE

: Clean/ Treated Water



## PRESSURE DIFFERENTIAL CONTROL VALVE

 Model
 : A800

 Size
 : DN 50-600 mm

 Pressure Ratings: PN10/16/25

 Temperature
 : 10°C to 80°C

 Medium
 : Clean/

: Clean/ Treated Water



#### **BASIC CONTROL VALVE**

Model : A900
Size : DN 50-600 mm
Pressure ratings : PN10/16/25
Temperature : 10°C to 80°C
Medium : Clean/

Treated Water



## PRESSURE SUSTAINING / REDUCING VALVE

 Model
 : A205

 Size
 : DN 50-600 mm

 Pressure ratings
 : PN10/16/25

 Temperature
 : 10°C to 80°C

 Medium
 : Clean/

**Treated Water** 



### ALTITUDE VALVE

Model : A10A Size : DN 50-600 mm Pressure Ratings : PN10/16/25 Temperature : 10°C to 80°C Medium : Clean/ Treated Water












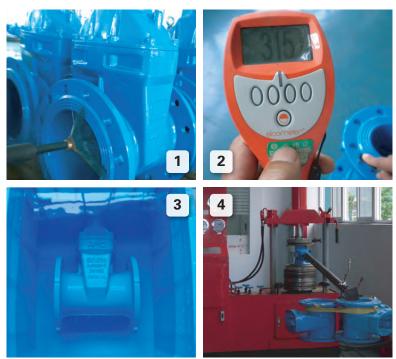

# **TEST**


- 1. Holiday Test
- 2. Coating Thickness Test
- 3. Soaking Test
- 4. Torque Test for R-Key
















www.afcmalaysia.com

# AFC VALVES MALAYSIA SDN. BHD.

No.6, Jalan Sg.Jeluh 32/189, Bukit Naga industrial Park, Seksyen 32, 40460 Shah Alam, Selangor D.E., Malaysia

**T**:+603-5167 2818 **F**:+603-5167 2817 **E**:sales@afcmalaysia.com

W: www.afcmalaysia.com

### AFC VALVES (SARAWAK) SDN. BHD.

Sublot 1, Lot 3527, Block 226, Taman STC, Batu 5, Jalan Penrissen 93250 Kuching, Sarawak.

**T**: +608-257 3018 **F**: +608-257 3016

**E**: sales@afcmalaysia.com **W**: www.afcmalaysia.com

#### **ALPINE FLOW CONTROL CO. LTD.**

B5, Chao Yang Factory, Caohu Industrial Park, XiangCheng Economic Development Zone, Suzhou, Jiangsu Province, China. ZIP: 215131

T: +86-512 6673 2918
F: +86-512 6673 2928
E: exsales@alpinefc.com.cn
W: www.alpinefc.com.cn

### PT. AFC BERJAYA INDONESIA

Sedayu Square Blok L35 Jl. Kamal Raya Outer Ring Road Cenkareng, Jakarta Barat, Indonesia

T:+628-21 2255 9785
E:sales@afcindonesia.com
W:www.afcmalaysia.com

# AFC VALVES VIETNAM LIMITED COMPANY

No.19, Nguyen Son Street, Long Bien District, Ha Noi Vietnam.

**T**: +84-243 675 6037 +84-971 707 888

**E**: info@afcvalvesvietnam.com **W**: www.afcvalvesvietnam.com

